


# D0-5

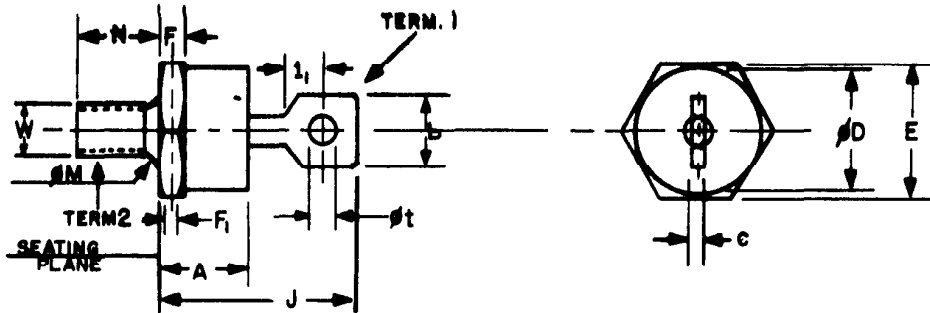

SYMBOL	INCHES		MILLIMETERS		NOTES
	MIN.	MAX.	MIN.	MAX.	
A		.450		11.43	
b		.375		9.53	2
c		.080		2.03	
ØD		.667		16.94	
E	.667	.687	16.94	17.45	
F	.115	.200	2.92	5.08	
F <sub>1</sub>	.060		1.52		
J		1.000		25.40	
l	.156		3.96		4
ØM	.220	.249	5.59	6.32	1
N	.422	.453	10.72	11.51	
Øt	.140	.175	3.56	4.45	
W					1, 3

**NOTES:**

1. COMPLETE THREADS TO EXTEND TO WITHIN 2-1/2 THREADS OF SEATING PLANE.
2. ANGULAR ORIENTATION OF THIS TERMINAL IS UNDEFINED.
3. 1/4-28 UNF-2A. MAXIMUM PITCH DIAMETER OF PLATED THREADS SHALL BE BASIC PITCH DIAMETER (.2268", 5.74 MM) REF. (SCREW THREAD STANDARDS FOR FEDERAL SERVICES 1957) HANDBOOK H28 1957 P1.
4. MINIMUM FLAT.

EIA-NEMA STANDARD OUTLINE, NEMA SK-51 - EIA RS-241.