


# 00-7

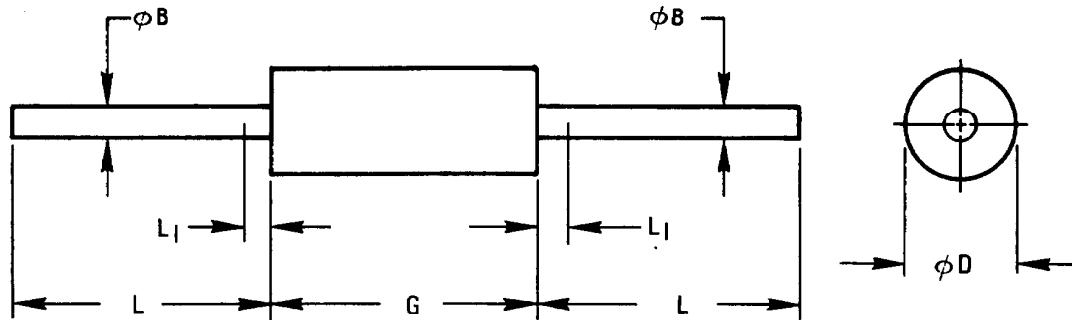

MILLIMETER DIMENSIONS ARE DERIVED FROM ORIGINAL INCH DIMENSIONS

| SYMBOL   | INCHES |      | MILLIMETERS |       | NOTES |
|----------|--------|------|-------------|-------|-------|
|          | MIN.   | MAX. | MIN.        | MAX.  |       |
| $\phi B$ | .018   | .022 | 0.458       | 0.558 | -     |
| $\phi D$ | .085   | .107 | 2.16        | 2.71  | 1     |
| G        | .230   | .300 | 5.85        | 7.62  | 1     |
| L        | 1.000  | -    | 25.40       | -     | -     |
| $L_1$    | -      | .050 | -           | 1.27  | 2     |

## NOTES:

1. PACKAGE CONTOUR OPTIONAL WITHIN CYLINDER OF DIAMETER  $\phi D$  AND LENGTH G. SLUGS, IF ANY, SHALL BE INCLUDED WITHIN THIS CYLINDER BUT SHALL NOT BE SUBJECT TO THE MINIMUM LIMIT OF  $\phi D$ .
2. LEAD DIAMETER NOT CONTROLLED IN THIS ZONE TO ALLOW FOR FLASH, LEAD FINISH BUILD-UP, AND MINOR IRREGULARITIES OTHER THAN SLUGS.