


DO-12

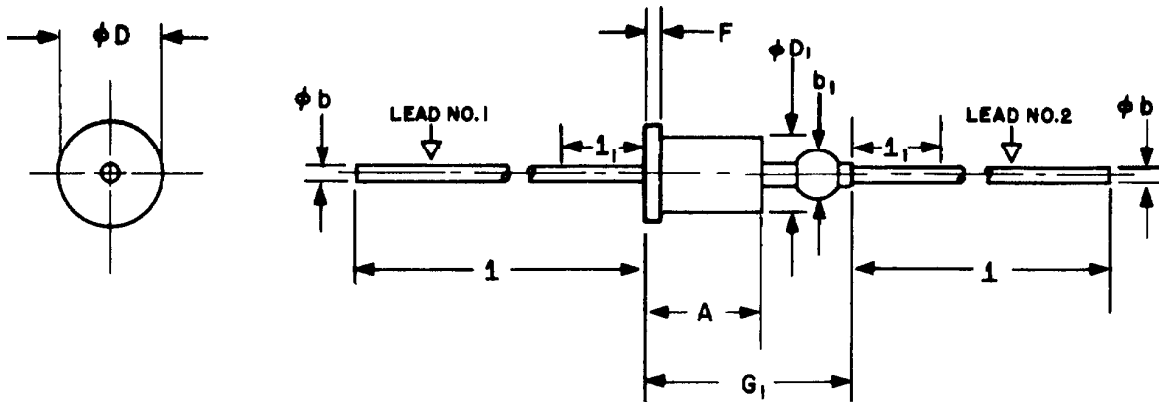

SYMBOL	INCHES		MILLIMETERS		NOTES
	MIN.	MAX.	MIN.	MAX.	
A		.350		8.89	
ϕb	.017	.035	.43	.89	
b_1	.045	.125	1.14	3.18	1
ϕD	.213	.265	5.41	6.73	3
ϕD_1	.175	.210	4.45	5.33	3
F	.020	.045	.51	1.14	
G_1		.600		15.24	
1	1.000	1.625	25.40	41.28	
1_1		.188		4.78	2

NOTES:

1. DIMENSION TO ALLOW FOR PINCH OR SEAL DEFORMATION ANYWHERE ALONG TUBULATION (OPTIONAL).
2. WITHIN THIS ZONE THE DIAMETER MAY VARY TO ALLOW FOR LEAD FINISHES AND IRREGULARITIES.
3. DIAMETERS ϕD AND ϕD_1 SHALL DIFFER BY AT LEAST .010" (.254 MM).