


TO-17

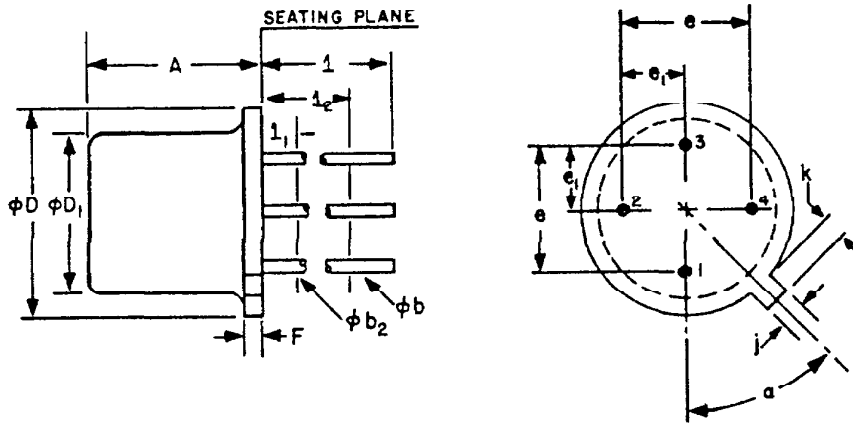

SYMBOL	INCHES		MILLIMETERS		NOTES
	MIN.	MAX.	MIN.	MAX.	
A	.165	.210	4.19	5.33	
ϕb	.016	.021	.406	.533	1
ϕb_2	.016	.019	.406	.483	1
ϕD	.185	.215	4.70	5.46	
ϕD_1	.150	.168	3.81	4.27	
e	.071 T.P.		1.80 T.P.		2
e ₁	.036 T.P.		.914 T.P.		
F		.030		.762	
j	.030	.045	.762	1.14	
k	.028	.048	.711	1.22	4
l	.500		12.70		1
l ₁		.050		1.27	1
l ₂	.250		6.35		1
a	45° T.P.				3

NOTES:

- (FOUR LEADS) ϕb_2 APPLIES BETWEEN l₁ AND l₂. ϕb APPLIES BETWEEN l₂ AND .5" (12.70 MM) FROM SEATING PLANE. DIAMETER IS UNCONTROLLED IN l₁ AND BEYOND .5" (12.70 MM) FROM SEATING PLANE.
- LEADS HAVING MAXIMUM DIAMETERS .019" (.483 MM) MEASURED AT A GAGING PLANE .054" (1.37 MM) + .001" (.025 MM) - .000" (.000 MM) BELOW THE SEATING PLANE OF THE DEVICE SHALL BE WITHIN .007" (.178 MM) OF THEIR TRUE POSITIONS RELATIVE TO A MAXIMUM-WIDTH TAB AND TO THE .215" (5.46 MM) DIAMETER.
- TAB CENTERLINE. INDEX TAB FOR VISUAL ORIENTATION ONLY.
- MEASURED FROM MAXIMUM DIAMETER OF ACTUAL DEVICE.